

I **I PRN200W**
200W LED Projector



SPECIFICATIONS · PRODUCT DATA

I IPRN200W

200W LED IPRN



HIGH EFFICIENCY
100 lm/W

RECOMMENDED

XXXX

XXXXX

XXXX

MAIN CHARACTERISTICS

XXXX

XXXXX

BENEFITS OF THIS PRODUCT

XXX

XXX

PRE-
MIUM

PRO

ECO

2

WARRANTY


HQ

HIGH QUALITY


SPECIFICATIONS · PRODUCT DATA

Electrical data	
Input	220 ~ 240Vac
Mains frequency	50/60Hz
Power	200W
Power factor	>0,9
LEDs no.	288 chips SMD2835
LED power	0.69W
IEC protection Class	Class I
Photometric data	
Luminous efficiency	100 lm/w
CRI (Ra)	>80
Luminous flux (Nominal/Real) CCT	26000 / 20000 lm · 6500K · BF
Luminous intensity	4906cd
SDCM Standard deviation colour adjustment	< 3
Degree of opening	120
Working Temp.	-20°C +40°C
Switchovers No.	30.000
Certifications	CE, RoHS,
Energy Efficiency	A+
Working life	30.000h (L70:B10)
Materials and physical characteristics	
Body	Aluminum casting
Diffuser	Tempered glass
Reflector	Aluminum
Bracket	Aluminum casting
Finish	Black RAL 7015
Glow wire test	650°C, 30s
Measurements in mm (length x width x height)	360 X 73 X 237
Weight (g)	3465
Characteristics	
IP Rating	65
IK Rating	08
UGR Rating	<22
Options	
Controller option	NO
Emergency Kit (KE) Option	NO
Sensor Movement (SP) Option	YES (SP65)
Packaging	
Units (parts/unit)	4 units box

H (m)	Diameter (m)	E _{max} (lx)
1	2,64	4886
2	5,28	1222
3	7,92	543
4	10,57	305

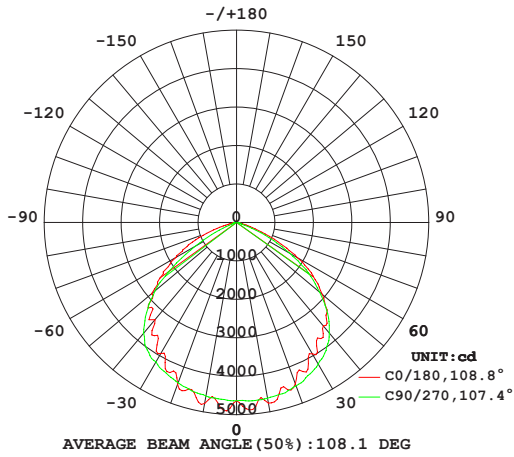

Measurements in mm

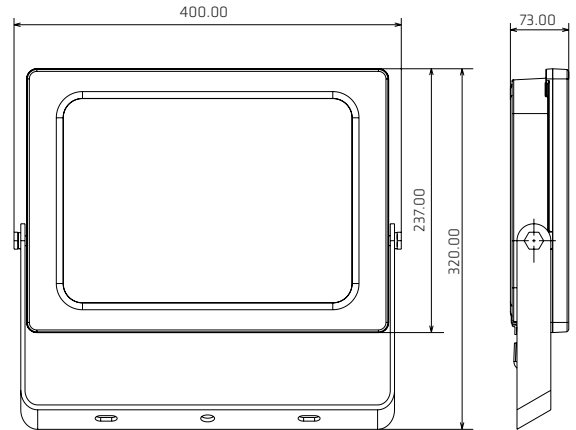

References

IIIIII	💡	W	💡	∠	CCT	CRI	IIIIII SP
IPRN200WBFNE	NE	200 W	20000 lm	120°	BF: 6500K	> 80	IPRN200WSPBFNE

Recommendations for use

It is recommended for a maximum daily use between 6 to 8 hours.

Installation

